

CSM®



Membrane Technologies
(RO/NF)



Updated June 1st, 2010

* Additional updates to product specifications may have been implemented after the release of this document.

Regularly check our website at www.csmfilter.com for the latest product performance data.

Applying innovative ideas Woongjin Chemical brings you fresh solutions

CSM membrane technologies aims to deliver innovative and reliable products that help enhance the standards of living.

CSM Applications

ULTRAPURE WATER

Rinsing water for fabrication of semiconductors, LCDs, and PCBs

PROCESS PURE WATER / COOLING TOWER MAKEUP WATER / BOILER FEED WATER

Reduces ion concentrations and prevents scaling and corrosion within the pipe

POTABLE WATER

Removes excess minerals, bacteria and viruses

RECYCLING AND ZERO DISCHARGE SYSTEM

Elimination of sewage and accomplishment of zero discharge system

RECOVERY OF DYESTUFF

Dye recovery and reuse

PRODUCTION OF BEVERAGES

Concentration of fruit juices

SEAWATER DESALINATION

Reduces salt concentrations for residential and industrial applications



CSM BWM Brackish Water Membrane

Model Name	Performance		Effective Area ft ² (m ²)	Dimension		Test Condition
	Permeate Flow rate GPD (m ³ /day)	Salt Rejection %		Dia Inch (mm)	Length Inch (mm)	
RE16040-BE	41,000 (155.0)	99.7	1600 (148.6)	16 (400)	40 (1016)	40" BW Standard
RE8040-BE*	10,500 (39.7)	99.7	400 (37.2)	8.0 (203)	40 (1016)	40" BW Standard
RE8040-BE440	11,500 (43.5)	99.7	440 (40.9)	8.0 (203)	40 (1016)	40" BW Standard
RE8040-BN	9,500 (36.0)	99.7	365 (33.9)	8.0 (203)	40 (1016)	40" BW Standard
RE8040-BR	6,000 (22.7)	99.75	380 (35.3)	8.0 (203)	40 (1016)	40" BW Standard
RE4040-BE	2,400 (9.1)	99.7	85 (7.9)	4.0 (102)	40 (1016)	40" BW Standard
RE4040-BN	2,000 (7.6)	99.7	75 (7.0)	4.0 (102)	40 (1016)	40" BW Standard
RE4021-BE	1,000 (3.8)	99.7	35 (3.3)	4.0 (102)	21 (533)	21" BW Standard

*Certified by NSF to NSF/ANSI standard 61


• 40" BW Standard test conditions : NaCl 2,000 mg/L, Pressure 225 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 15%

• 21" BW Standard test conditions : NaCl 2,000 mg/L, Pressure 225 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 8%

• The above data were obtained after operating membrane element at the standard test conditions for 30min.



CSM UPWM Ultrapure Water Membrane

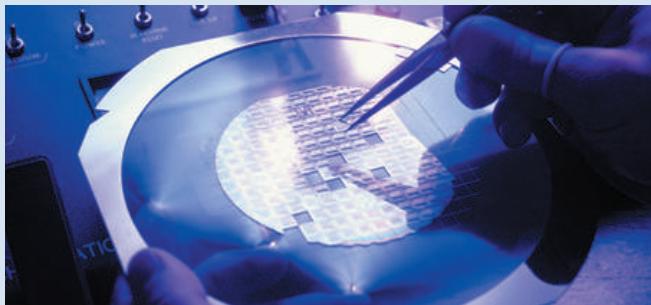


- Ultrapure water for manufacturing of semiconductors, LCDs and electronics.
- High TOC rejection, low TOC extraction and TOC rinse down.

Model Name	Performance			Effective Area ft ² (m ²)	Dimension		Test Condition
	Permeate Flow rate GPD (m ³ /day)	NaCl Rejection %	IPA Rejection %		Dia Inch (mm)	Length Inch (mm)	
RE8040-HUE440	10,000 (37.9)	99.5	96.0	440 (40.9)	8.0 (203)	40 (1016)	40" BW Standard
RE8040-HUE	9,000 (34.1)	99.5	96.0	400 (37.2)	8.0 (203)	40 (1016)	40" BW Standard
RE8040-UR	5,500 (20.8)	99.7	96.0	400 (37.2)	8.0 (203)	40 (1016)	40" BW Standard
RE8040-UL	10,000 (37.9)	99.5	92.0	400 (37.2)	8.0 (203)	40 (1016)	40" LP Standard

- 40" BW Standard test conditions : NaCl 2,000 mg/L, Pressure 225 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 15%
- 40" LP Standard test conditions : NaCl 1,500 mg/L, Pressure 150 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 15%
- IPA rejection test conditions : IPA 1,000 mg/L, Pressure 225 psig for UE, HUE and 150 psig for UL Temperature 25°C, pH 6.5 ~ 7.0, Recovery 15%
- The above data were obtained after operating membrane element at the standard test conditions for 30min.
- IPA rejection data were obtained after operating membrane element at the IPA rejection test conditions for 2 hours.

IPA Rejections of CSM UPW Membrane

- Test Conditions : 225psig, 25 °C, Recovery15%, pH6.5~7.0
- Analyzed by Anatel -1000

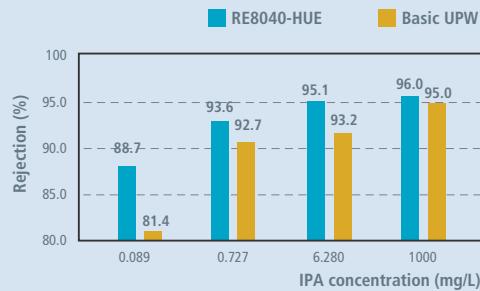


Low TOC Extraction Property

Comparisons of TOC extractions of various UPW elements in the market:

- Extraction testing method: after dipping the weighted permeate channel in 800ml of feed water during 4hours, the extracted TOC conc. was measured. Calculation method for TOC quantity extracted from permeate channel:


[(TOC conc. after 4hours dipping - feed water TOC conc. before dipping) x [feed water quantity 0.8Lx0.001])
Feed water TOC conc. 198ppb

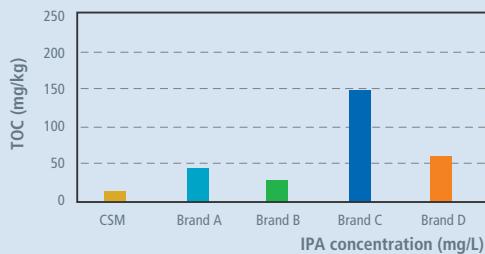

TOC Rinse Down Behavior

Operating Conditions

- Feed TOC : 40~80 ppb
- recovery : 90%
- Feed Pressure : 15bar
- TOC analyzer : Anatel - A1000

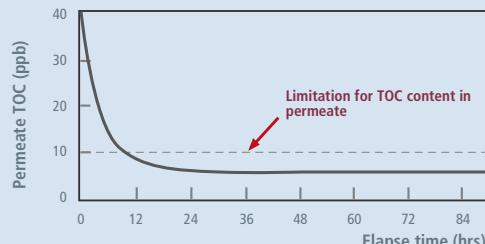

CSM LPM Low Pressure Membrane

- An efficient and cost-effective solution for energy-savings.
- High salt-rejection at low pressures.

Model Name	Performance		Effective Area ft ² (m ²)	Dimension		Test Condition
	Permeate Flow rate GPD (m ³ /day)	Salt Rejection %		Dia Inch (mm)	Length Inch (mm)	
RE16040-BLR	36,000 (136.3)	99.6	1600 (148.6)	16 (400)	40 (1016)	40" LP Standard
RE8040-BLN440	13,000 (49.2)	99.2	440 (40.9)	8.0 (203)	40 (1016)	40" LP Standard
RE8040-BLN*	12,000 (45.4)	99.2	400 (37.2)	8.0 (203)	40 (1016)	40" LP Standard
RE8040-BLF*	11,500 (43.5)	99.2	400 (37.2)	8.0 (203)	40 (1016)	40" LP High Flux
RE8040-BLR440	9,900 (37.4)	99.6	440 (40.9)	8.0 (203)	40 (1016)	40" LP Standard
RE8040-BLR*	9,000 (34.1)	99.6	400 (37.2)	8.0 (203)	40 (1016)	40" LP Standard
RE4040-BLN*	2,600 (9.8)	99.2	85 (7.9)	4.0 (102)	40 (1016)	40" LP Standard
RE4040-BLF*	2,500 (9.5)	99.2	85 (7.9)	4.0 (102)	40 (1016)	40" LP High Flux
RE4040-BLR*	1,900 (7.2)	99.6	85 (7.9)	4.0 (102)	40 (1016)	40" LP Standard
RE4040-TL	2,600 (9.8)	99.0	85 (7.9)	4.0 (102)	40 (1016)	40" LP Standard
RE4021-BL	1,000 (3.8)	99.2	35 (3.3)	4.0 (102)	21 (533)	21" BW Standard
RE4021-TL	1,050 (4.0)	99.0	35 (3.3)	4.0 (102)	21 (533)	21" LP Standard
RE2540-TL	850 (3.2)	99.0	27 (2.5)	2.5 (64)	40 (1016)	40" LP Standard
RE2521-TL	300 (1.1)	99.0	12 (1.1)	2.5 (64)	21 (533)	21" LP Standard

*Certified by NSF to NSF/ANSI standard 61


- 40" LP Standard test conditions : NaCl 1,500 mg/L, Pressure 150 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 15%
- 21" LP Standard test conditions : NaCl 1,500 mg/L, Pressure 150 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 8%
- 40" LP High Flux test conditions : NaCl 500 mg/L, Pressure 100 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 15%
- 21" BW Standard test conditions: NaCl 2,000 mg/L, Pressure 225 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 8%
- The above data were obtained after operating membrane element at the standard test conditions for 30min.

Product Characteristics


Comparisons of Permeate TDS and Operating Pressure between CSM Brackish Water and Low Pressure membranes

*Feed water conditions: NaCl concentration: 500mg/L; permeate flux: 15gfd; Temp: 25°C; Recovery: 15%

Permeate Conductivity

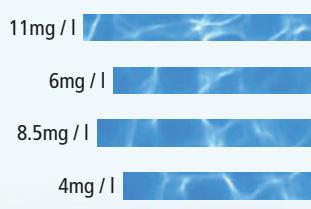

Operating Pressure

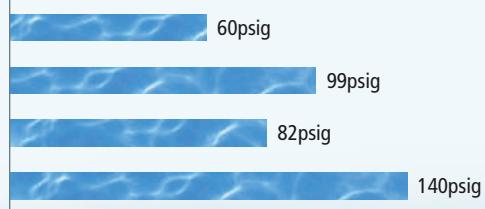

BLF

Ideal for when:

- Feed water TDS concentration is low
- High salt rejection is not required
- Energy saving is required through low pressure operation

BLR

Ideal for when:

- Feed water TDS concentration is high
- Energy saving is needed through low pressure operation

BLN

Ideal for when:

- Salt rejection and specific permeate flux are between BLR and BLF products

CSM FRM Fouling Resistant Membrane

- Ideal for feed water with high fouling potentials such as wastewater reuse and surface water applications.
- Saves operating costs by reducing the number of CIPs.

Model Name	Performance		Effective Area ft ² (m ²)	Dimension		Test Condition
	Permeate Flow rate GPD (m ³ /day)	Salt Rejection %		Dia Inch (mm)	Length Inch (mm)	
RE16040-FE ⁿ	41,000 (155.0)	99.7	1600 (148.6)	16 (400)	40 (1016)	40" BW Standard
RE8040-FE ⁿ	10,500 (39.7)	99.7	400 (37.2)	8.0 (203)	40 (1016)	40" BW Standard
RE8040-FN	9,500 (36.0)	99.7	365 (33.9)	8.0 (203)	40 (1016)	40" BW Standard
RE8040-FD ⁿ	10,000 (37.9)	99.7	380 (35.3)	8.0 (203)	40 (1016)	40" BW Standard
RE4040-FE ⁿ	2,400 (9.1)	99.7	85 (7.9)	4.0 (102)	40 (1016)	40" BW Standard
RE16040-FLR	36,000 (136.0)	99.6	1600 (148.6)	16 (400)	40 (1016)	40" LP Standard
RE8040-FLR	9,000 (34.0)	99.6	400 (37.2)	8.0 (203)	40 (1016)	40" LP Standard
RE8040-FL ⁿ	11,000 (41.6)	99.0	400 (37.2)	8.0 (203)	40 (1016)	40" LP Standard
RE4040-FLR	1,900 (7.2)	99.6	85 (7.9)	4.0 (102)	40 (1016)	40" LP Standard
RE4040-FL ⁿ	2,400 (9.1)	99.0	85 (7.9)	4.0 (102)	40 (1016)	40" LP Standard

- 40" BW Standard test conditions : NaCl 2,000 mg/L, Pressure 225 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 15%
- 40" LP Standard test conditions : NaCl 1,500 mg/L, Pressure 150 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 15%
- The above data were obtained after operating membrane element at the standard test conditions for 30min


FRM performance in the field

- Location : ASAN,KOREA (Motor Company)
- Capacity : 5,000m³/day (Zero Discharge)
- Feed Water Source : Tertiary Treated Wastewater & Sewage
- RO System Configuration
 - 1st Pass : 12 : 5 : 2array, 75%recovery 2Trains of 114pcs of CSM FRM elements
 - 2nd Pass for 1st Pass Brine: 4 : 2 : 1 array, 50%recovery 32pcs of SW RO membrane


[Feed Water Quality]

Parameter	Unit	Jun.2004
Na	mg/L	810
Cl	mg/L	1,223
SiO ₂	mg/L	8.49
Turbidity	NTU	1.2
Conductivity	μS/cm	3,920
TOC	mg/L	23.6
SDI (15min)	-	Over5.0

[Normalized Permeate Flow rate]


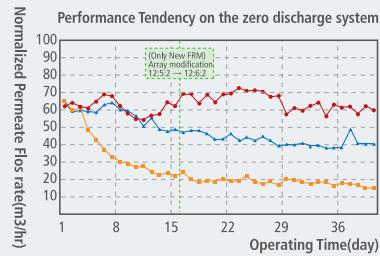


[Salt Rejection]

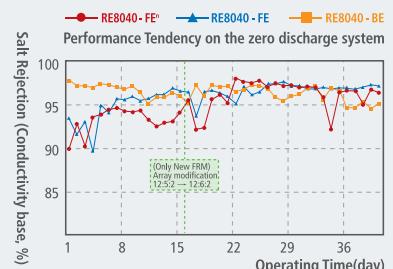

CSM FRM Fouling Resistant Membrane

- Modification of surface roughness, surface charge, and hydrophilicity of the membrane.
- Feed water containing high amount of charged (+,-) and/or non-charged foulants, organic matters, colloidal particles.

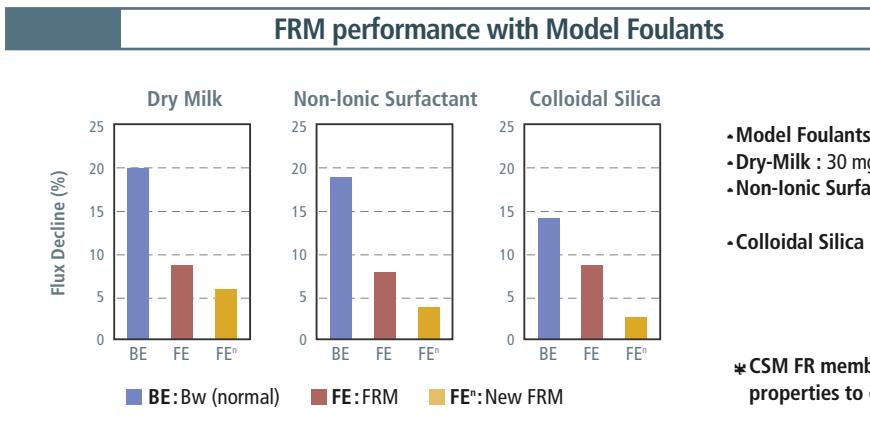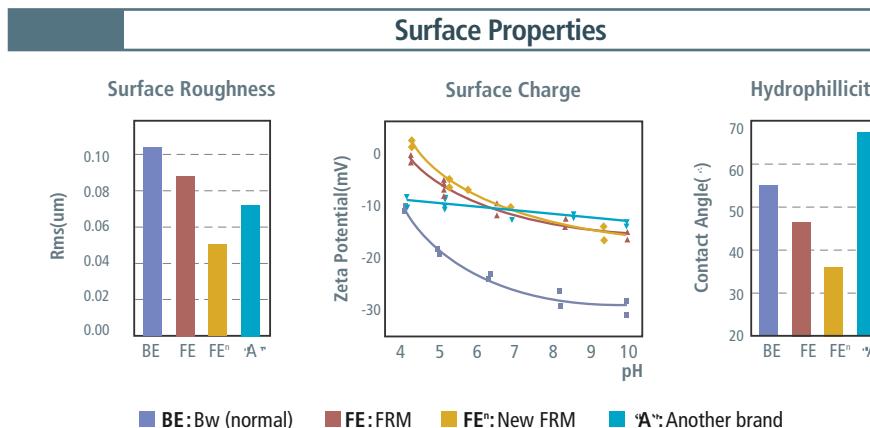

References

Customers	Location	Model	Capacity	Date
VEOLIA WATER (Wollongong) (Wastewater reclamation)	AUSTRALIA	RE8040-FE ⁿ	20,000 m ³ /day (1,610 pcs)	JUN. 2007 APR. 2008
BRISBANE WATER (Luggage Point) (Sewage reclamation)	AUSTRALIA	RE8040-FE ⁿ	16,000 m ³ /day (1,116 pcs)	MAR. 2008
SAMSUNG TOTAL (Boiler Feed)	KOREA	RE8040-FE	65,520 m/day (3,168 pcs)	Since JUL. 2002
VEOLIA WATER (Kranji II) Expansion (Sewage reclamation)	SINGAPORE	RE8040-FE	42,000 m ³ /day (2,674 pcs)	FEB. 2006
UNITED KG (Boiler Feed Water)	THAILAND	RE8040-FE	9,200 m ³ /day (540 pcs)	APR. 2006
WEIDNER (Process Water)	UKRAINE	RE8040-FL	5,200 m ³ /day (360 pcs)	AUG. 2005

CSM SWM Sea Water Membrane

- Seawater desalination application for industrial or potable uses.
- Able to purify high TDS brackish water containing TDS more than 10,000 ppm.

Model Name	Performance		Effective Area ft ² (m ²)	Dimension		Test Condition
	Permeate Flow rate GPD (m ³ /day)	Salt Rejection %		Dia Inch (mm)	Length Inch (mm)	
RE16040-SHN	24,600 (93.1)	99.75	1600 (148.6)	16 (400)	40 (1016)	40" SW Standard
RE16040-SHF	36,000 (136.1)	99.7	1600 (148.6)	16 (400)	40 (1016)	40" SW Standard
RE8040-SN	6,000 (22.7)	99.2	370 (34.4)	8.0 (203)	40 (1016)	40" SW Standard
RE8040-SH	4,500 (17.0)	99.75	370 (34.4)	8.0 (203)	40 (1016)	40" SW Standard
RE8040-SHA400	7,500 (28.4)	99.75	400 (37.2)	8.0 (203)	40 (1016)	40" SW Standard
RE8040-SHF	9,000 (34.0)	99.7	370 (34.4)	8.0 (203)	40 (1016)	40" SW Standard
RE8040-SHN	6,000 (22.7)	99.75	370 (34.4)	8.0 (203)	40 (1016)	40" SW Standard
RE8040-SHN400	6,500 (24.6)	99.75	400 (37.2)	8.0 (203)	40 (1016)	40" SW Standard
RE4040-SHA	1,400 (5.3)	99.75	74 (6.9)	4.0 (102)	40 (1016)	40" SW Standard
RE4040-SHF	1,900 (7.2)	99.7	75 (7.0)	4.0 (102)	40 (1016)	40" SW Standard

- 40" SW Standard test conditions : NaCl 32,000 mg/L, Pressure 800 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 8%
- 21" SW Standard test conditions : NaCl 32,000 mg/L, Pressure 800 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 4%
- The above data were obtained after operating membrane element at the standard test conditions for 30min.

Customers	Location	Model	Capacity	Date
SOUTH PARS (PHASE (2&3)	IRAN	RE8040-SN RE8040-BE	1800 m ³ /day	AUG. 2000
SOUTH PARS (PHASE (4&5)	IRAN	RE8040-SR RE8040-BE	360 m ³ /day	MAY. 2003
CHANGZHOU CANGJIN CHEMICAL	CHINA	RE8040-SR	1200m ³ /hr	APR. 2004
HYDROPRO	VENEZUELA / MASHAL	RE8040-SR	153 PCS	MAR. 2003
MEMBRANE TECH. IND.	U.S.A / HAWAII	RE8040-SR	1440 m ³ /day	JUN. 2004
KOREA NAVY FORCE	KOREA JINHAE	RE4040-SR	1485 PCS	Since 1998

CSM NFM Nanofiltration Membrane (NFM)



- Up to 95% rejection rate of divalent ions.
- Ideal for water softening, dye recovery, and food applications.
- Also used in the pretreatment of desalination systems.

Model Name	Performance				Effective Area ft ² (m ²)	Dimension		Test Condition
	Permeate Flow rate GPD (m ³ /day)	NaCl Rejection %	MgSO ₄ Rejection %	CaCl ₂ Rejection %		Dia Inch (mm)	Length Inch (mm)	
NE8040-90*	7,500 (28.4)	85~95	97.0	90~95	400 (37.2)	8.0 (203)	40 (1016)	NE Standard
NE4040-90*	1,600 (6.0)	85~95	97.0	90~95	85 (7.9)	4.0 (102)	40 (1016)	NE Standard
NE2540-90	500 (1.9)	85~95	97.0	90~95	27 (2.5)	2.5 (64)	40 (1016)	NE Standard
NE8040-70	7,000 (26.5)	40~70	97.0	45~70	400 (37.2)	8.0 (203)	40 (1016)	NE Standard
NE4040-70	1,500 (5.6)	40~70	97.0	45~70	85 (7.9)	4.0 (102)	40 (1016)	NE Standard
NE2540-70	450 (1.7)	40~70	97.0	45~70	27 (2.5)	2.5 (64)	40 (1016)	NE Standard

*Certified by NSF to NSF/ANSI standard 61


- NE Standard test conditions: NaCl 2,000 mg/L, 75psig, 25°C, pH 6.5 ~ 7.0, Recovery 15%
- MgSO₄ rejection test conditions: MgSO₄ 2,000 mg/L, 75psig, 25°C, pH 6.5 ~ 7.0, Recovery 15%
- CaCl₂ rejection test conditions: CaCl₂ 500 mg/L, 75psig, 25°C, pH 6.5 ~ 7.0, Recovery 15%

Pilot test results in a municipal WTP


Water source:Paldang Lake in South Korea
Model : NE4040-90

* "A": Another brand

	CSM NE90	"A"	Remark
DOC Removal Efficiency	80% ↑	80% ↑	CSM NE 90 = "A"
Permeability (l/d .m ² .kPa)	2.0	1.5	CSM NE 90 > "A"

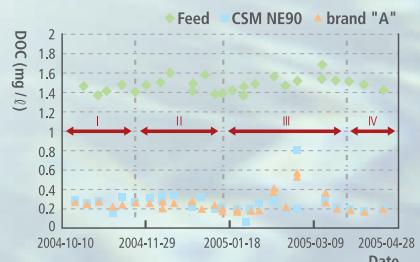

Organic Rejection Ratios of CSM NE90

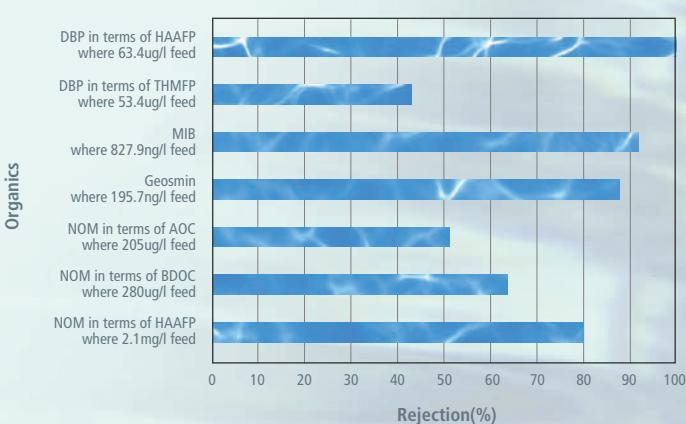

CSM TWM Tap Water Membrane

- Ideal for removing low molecular weight polluted substances.
- Ideal for treating small quantities of water.

Model Name	Performance		Effective Area ft ² (m ²)	Dimension		Test Condition
	Permeate Flow rate GPD (m ³ /day)	Salt Rejection %		Dia Inch (mm)	Length Inch (mm)	
RE4040-TE*	2,400 (9.1)	99.5	85 (7.9)	4.0 (102)	40 (1016)	40" BW Standard
RE4021-TE	1,000 (3.8)	99.5	35 (3.3)	4.0 (102)	21 (533)	21" BW Standard
RE2540-TE*	800 (3.0)	99.5	27 (2.5)	2.5 (64)	40 (1016)	40" BW Standard
RE2521-TE	300 (1.1)	99.5	12 (1.1)	2.5 (64)	21 (533)	21" BW Standard
RE4040-TL	2,600 (9.8)	99.2	85 (7.9)	4.0 (102)	40 (1016)	40" LP Standard
RE4021-TL	1,050 (4.0)	99.2	35 (3.3)	4.0 (102)	21 (533)	21" LP Standard
RE2540-TL	850 (3.2)	99.2	27 (2.5)	2.5 (64)	40 (1016)	40" LP Standard
RE2521-TL	300 (1.1)	99.2	12 (1.1)	2.5 (64)	21 (533)	21" LP Standard

*Certified by NSF to NSF/ANSI standard 61

- 40" BW Standard test conditions : NaCl 2,000 mg/L, Pressure 225 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 15%
- 21" BW Standard test conditions : NaCl 2,000 mg/L, Pressure 225 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 8%
- 40" LP Standard test conditions : NaCl 1,500 mg/L, Pressure 150 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 15%
- 21" LP Standard test conditions : NaCl 1,500 mg/L, Pressure 150 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 8%
- The above data were obtained after operating membrane element at the standard test conditions for 30min.

CSM HOUSEHOLD MEMBRANE

- CSM Household or Residential membranes can eliminate substances larger than 0.0001 μm such as carcinogens, THMs (Trihalomethanes), heavy metal ions, bacteria and viruses in the water.
- There are several different products from 35 GPD to 100 GPD.
- Both wet and dry type elements are available

Model Name	Performance		Dimension		Test Condition
	Permeate Flow rate GPD (L /day)	Salt Rejection %	Dia Inch (mm)	Length Inch (mm)	
RE1810-30	30 (114)	98.0	1.8 (46)	10 (254)	Household Standard
RE1810-50*	50 (189)	98.0	1.8 (45.7)	10 (254)	Household Standard
RE1812-35*	35 (132)	98.0	1.8 (46)	12 (305)	Household Standard
RE1812-CE60	60 (227)	99.5	1.8 (46)	10 (254)	Household Standard
RE70-1812-50	50 (189)	98.0	1.8 (45)	12 (305)	Household Standard
RE1812-60*	60 (227)	98.0	1.8 (46)	12 (305)	Household Standard
RE1812-80*	80 (303)	98.0	1.8 (46)	12 (305)	Household Standard
RE2012-100*	100 (397)	98.0	2.0 (50)	12 (304.8)	Household Standard
RE2012-HD	75 (284)	98.0	1.8 (45)	12 (305)	Household Standard
RE2012-LPF	60 (227)	93.0	2.0 (48)	12 (305)	Household LP
RE2010-LP*	30 (114)	93.0	2.0 (50)	10 (254)	Household LP
RE2012-LP*	50 (189)	93.0	2.0 (50)	12 (305)	Household LP
RE2812-300	300 (1136)	98.0	2.9 (74)	12 (305)	Household Standard

*Certified by NSF to NSF/ANSI standard 58

- Household Standard test conditions : NaCl 200mg/L, Pressure 60 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 10~20%
- Household LP test conditions : NaCl 100mg/L, Pressure 20 psig, Temperature 25°C, pH 6.5 ~ 7.0, Recovery 10~20%
- The above data were obtained after operating membrane element at the standard test conditions for 30min.
- The above data are based on nominal salt rejection



Membrane Technologies
(RO/NF)



23rd Floor Kukdong Building, Chungmuro 3-ga
Jung-gu, Seoul 100-705, South Korea

Tel. +82-2-3279-7000

Fax. +82-2-3279-7088

www.csmfilter.com

E-mail. csm@wjchemical.co.kr

WOONGJIN CHEMICAL AMERICA INC.

4 Executive Circle, Suite 150, Irvine, CA 92614, USA
TEL +1-949-797-9239 / FAX +1-949-797-9240 / csmusa@wjcs.com

WOONGJIN CHEMICAL SHANGHAI CO., LTD

Rm.2307, International Trade Center, 2200 Yanan Rd. (w), Shanghai, China 200339
TEL +86-21-6219-6384 / FAX +86-21-6219-0116

TIANJIN WOONGJIN CSM ECOTECH CO., LTD

NO.2 Keyuan 4st TEDA(Jinnan) Micro-electronics industrial Area
Balitai-Zhen Jinnan-District Tianjin China
TEL +86-22-2612-2264/9472/3039/4000 / FAX +86-22-2612-0588

WOONGJIN CHEMICAL CO., LTD JAPAN OFFICE

7th Fl., Akasaka Habitation Bldg., 1-3-5, Akasaka, Minato-ku, Tokyo, 107-0052, Japan
TEL +81-3-5114/5950~1 / FAX +81-3-3583-4361

WOONGJIN CHEMICAL CO., LTD INDIA OFFICE

No. 203, Mohta Building, Bhikaji Cama Place, New Delhi-110066, India
TEL +91-11-4607-5120 / FAX +91-11-4607-4300